



REV 版本	DESCRIPTION 描述	DATE 日期
V1		May-01-2005

PIN NAME	
1	LEDK
2	LEDA
3	GND
4	VDD
5	NC
6	NC
7	CS
8	RES
9	RS
10	WR
11	RD
12	D7
13	D6
14	D5
15	D4
16	D3
17	D2
18	D1
19	D0
20	GND

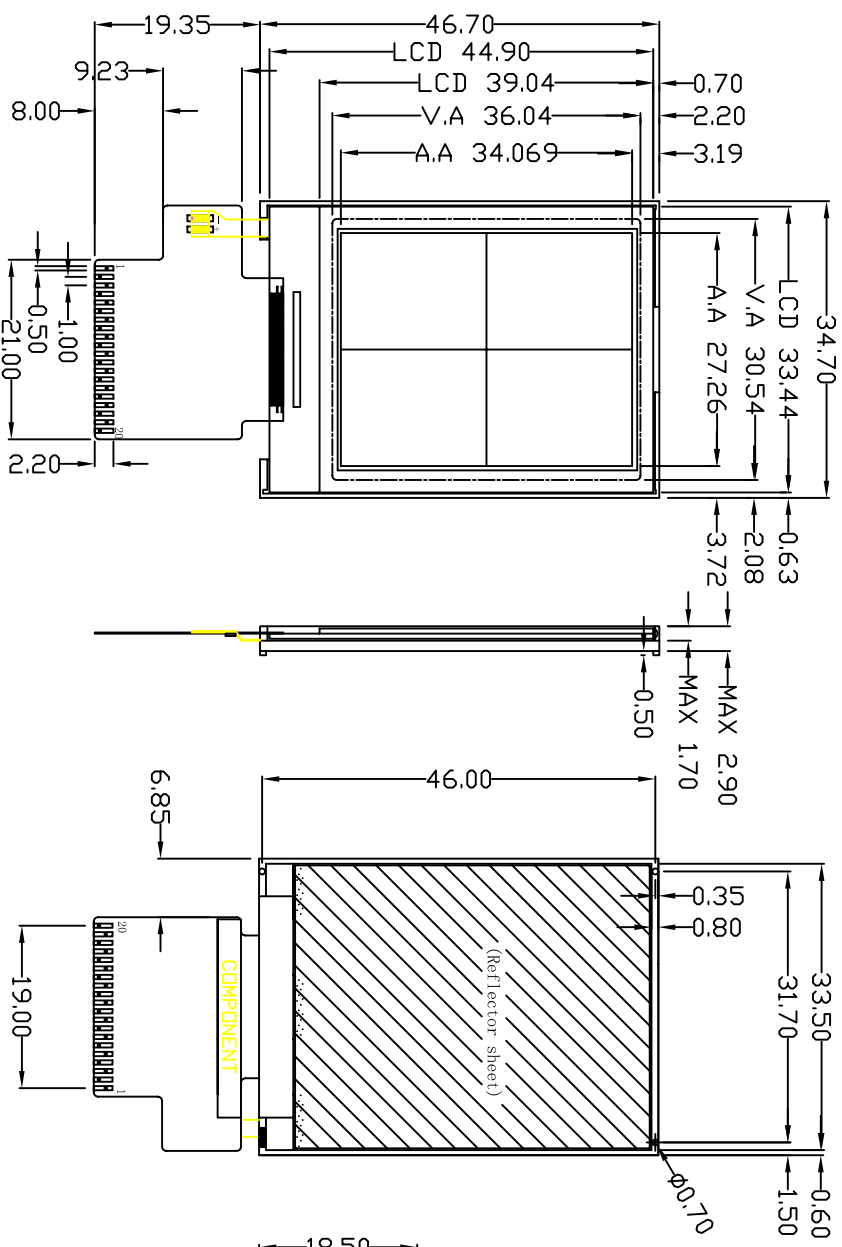

NOTES:

1. DISPLAY TYPE: CSTN/Normally White/transmissive
2. OPERATING VOLTAGE: 3.0V
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. DRIVE MODE: FPC(COG:ST7669)
6. VIEWING DIRECTION: 6 O'CLOCK
7. CONNECTOR:
8. UNMARKED TOLERANCE: ±0.2

SCALE: FIT	
SHEET: 1 OF 1	UNIT: mm
GENERAL TOL: ±0.3	MODEL NUMBER:
APPROVALS:	DATE:
APP: 廖神河	APP DATA:
CHK: 魏文根	CHK DATA:
DWN: 廖春今	DWN DATA:
PROJECTION:	PART NO: C/D