
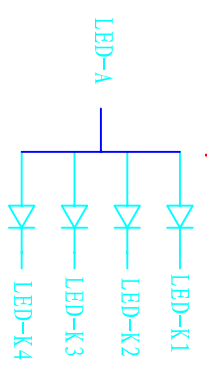


REV 版本	DESCRIPTION 描述	DATE 日期
V1	First issue	May-01-2005

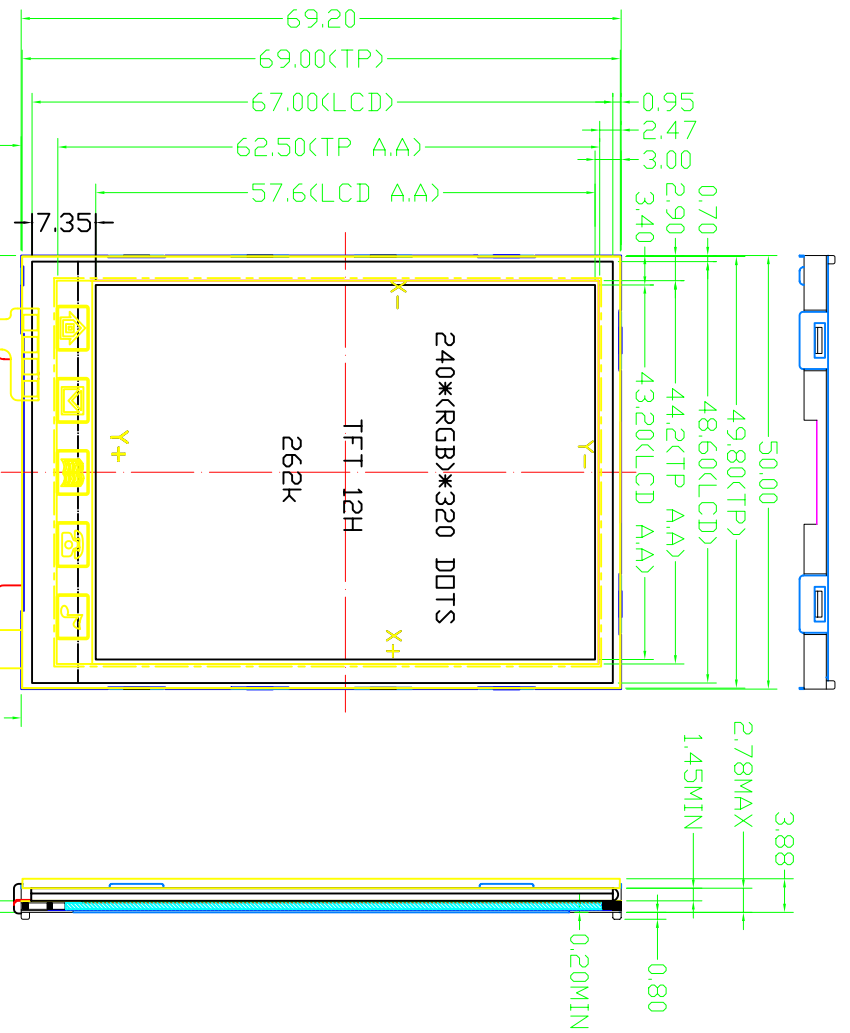

PIN	ASSIGNMENT
1	DB0
2	DB1
3	DB2
4	DB3
5	GND1
6	VCCI
7	/CS
8	RS
9	/WR
10	/RD
11	PSW0/DTX2
12	X+
13	Y+
14	X-
15	Y-
16	LEDA
17	LEDK1
18	LEDK2
19	LEDK3
20	LEDK4
21	NC
22	DB4
23	DB8
24	DB9
25	DB10
26	DB11
27	DB12
28	DB13
29	DB14
30	DB15
31	/RESET
32	VCI
33	VCC2
34	GND
35	DB5
36	DB6
37	DB7

- NOTES:
1. DISPLAY TYPE: TFT 262K/Normally White/transmissive
 2. OPERATING VOLTAGE: 3.0V
 3. OPERATING TEMPERATURE: -20°C~70°C
 4. STORAGE TEMPERATURE: -30°C~80°C
 5. DRIVE MODE: FPC(COG:LI19325)
 6. VIEWING DIRECTION: 12 O'CLOCK
 7. CONNECTOR:
 8. UNMARKED TOLERANCE: ±0.2

SCALE: FTT	UNIT	MODEL NUMBER	PROJECTION	PART NO: C/D
SHEET: 1 OF 1	mm	TGS280LWT-TV1	第三角	外形图
GENERAL TOL: ±0.3		APP: APP		
APPROVALS	DATE	CHK: CHK		
DWG: DWN		APP DATA		
		CHK DATA		
		DWN DATA		

W/IN STAC 威世达
微视显示器科技 (深圳) 有限公司
CRYSTAL COMPANY LTD.

DO NOT SCALE THIS DRAWING.